



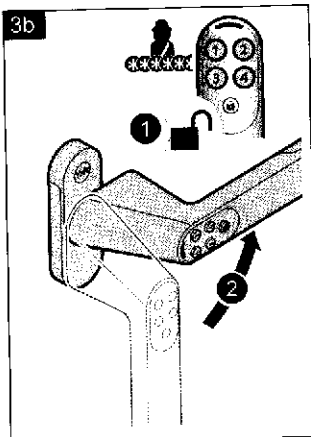


Test the handle in unlocked position by entering the factory code. 1-2-3-4-1-2, to unlock and twist the handle 90 degrees to open it. (See operating instructions for changing code).


4. Fit the Handle

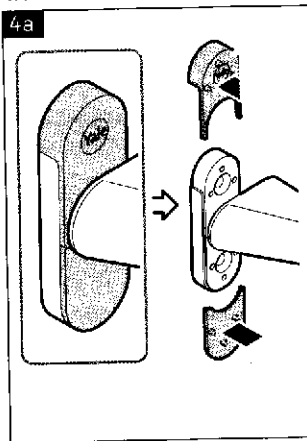

Pull and lift the handle plate covers to access the screw holes.

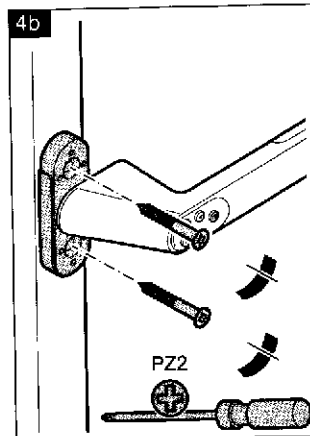


Fit the mounting screws through the handle plate's hole.

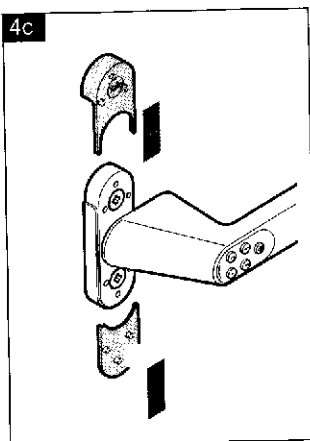


Put back the cover plates on the handle plate.

NOTE! See step 4d if long cover plate will be used.

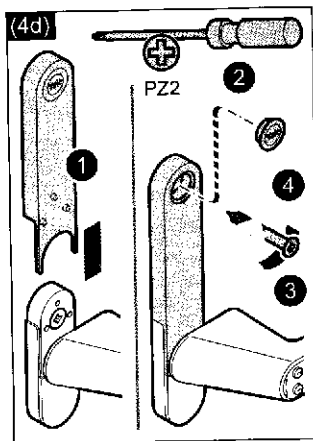

After long cover plate has been assembled on the handle plate, remove the Yale cover plug. Screw in the remaining 5 mm screw and put back the plug.

5. Final test

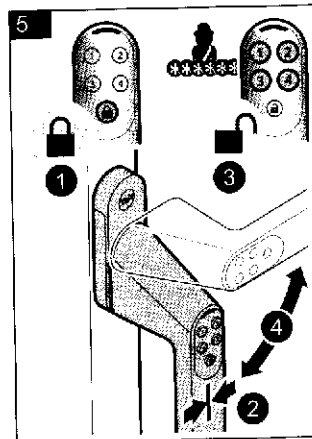

Test each function again:

1-2, Lock and try to turn the handle.
3-4, Unlock and open the door/window.